


## Single Directional CWDM OADM Module

Auxora's Single CWDM OADM is designed to add/drop CWDM signals into one fiber, which makes it a flexible, low-cost solution for increasing the bandwidth demand on enterprise and metro access networks. It can simultaneously support ESCON, ATM, Fiber Channel, Gigabit-Ethernet, without disturbing each other.

Auxora also provides customized design to suit situations in which your existing network has one or two fibers, redundant network, ring or linear network design etc.



### FEATURES

- Low insertion loss
- High channel isolation
- Optional extension ports for network upgrade
- Fully transparent to all data rates and protocols
- Exceptional reliability and stability
- Telcordia GR-1221/1209-CORE compliant

### APPLICATIONS

- Access networks
- Metro WDM systems
- Enterprise network
- Telecommunication
- Add/Drop channels

### SPECIFICATIONS


Parameters		1CH	2CH	3CH	4CH	5CH	6CH	7CH	8CH
Operating Wavelength (nm)		1260~1620							
Channel Passband (nm)		ITU±6.5							
Channel Spacing (nm)		20							
IL (dB)	Add & Drop	≤0.6	≤1.0	≤1.4	≤1.7	≤1.9	≤2.1	≤2.3	≤2.5
	Express Channel	≤0.8	≤1.4	≤2.1	≤2.8	≤3.5	≤4.2	≤4.8	≤5.4
Isolation (dB)	Adjacent Channel	≥30							
	Non-Adjacent Channel	≥45							
	Express Channel	≥25							
Pass band Ripple (dB)		≤0.5							
PDL (dB)		≤0.2							
PMD (ps)		≤0.1							
RL (dB)		≥50							
Directivity (dB)		≥50							
Max. Optical Power (mw)		500							
Operating Temperature (°C)		-5~75							
Storage Temperature (°C)		-40~85							
Fiber Type		Corning SMF-28e or G657A							
Package Dimension (mm)		ABS or LGX or 19" Rack or Customized							

### NOTES:

- 1) All specifications are based on the devices without connectors, and guaranteed over wavelength, polarization and temperature.
- 2) PMD and chromatic dispersion values are guaranteed by design.
- 3) IL is 0.3 dB higher, RL is 5 dB lower for connector added.
- 4) For modules with monitoring port/skipper UPG port/1310nm legacy port, IL is 0.3dB higher.
- 5) Specifications are subject to change without notice.

**Packing Types & Front Panels**

- 19" 1RU Rack chassis or 23" 1RU Rack chassis

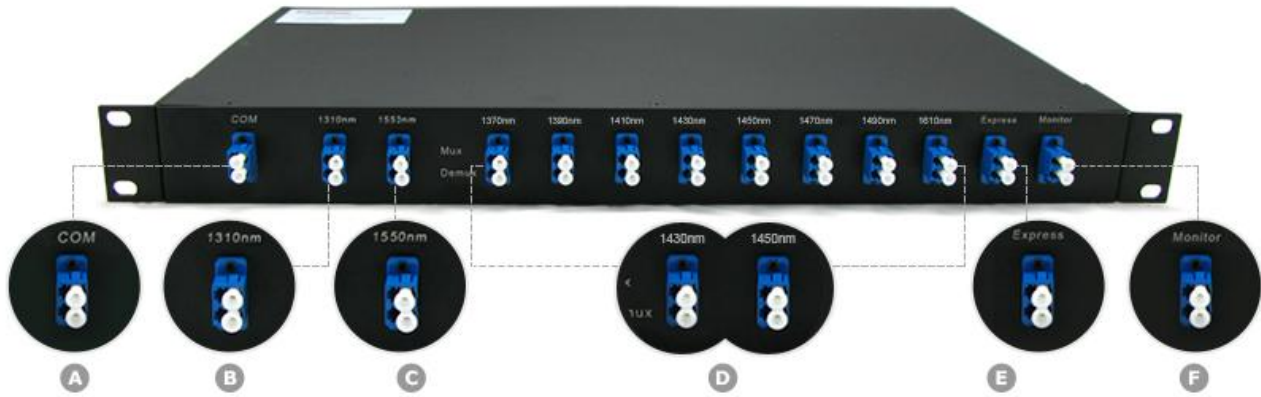

- LGX Metal Box



- ABS BOX:



**A. Common port:**

- LC, SC, ST and FC connectors available.

**B. Standard port 1310nm:**

- Allows a legacy 1310nm signal to pass. That is to say, it can carry LR optics, LX optics etc.
- LC, SC, ST and FC connectors available.

**C. Standard port 1550nm:**

- Allows a legacy 1550nm signal to pass. That is to say, it can carry ER optics, ZR optics, LX optics, ZX optics etc.
- LC, SC, ST and FC connectors available.

**D. Mux/Demux port for specific wavelengths:**

- LC, SC, ST and FC connectors available.
- Compliant with the ITU G.657A1 standard as default. These are available in ITU G.652, ITU G.652C and ITU G.652D on request. The 1390 and 1410 wavelengths are not recommended at ITU G.652 because of the higher attenuation.

**E. Express port:**

- Enables the cascading of two CWDM mux/demux modules, doubling the channel capacity on the common fiber link.
- Channel Isolation is 15dB as default, 16dB ~40dB available on request.  
LC, SC, ST and FC connectors available.

**F. Monitor port:**


- Connects measurement/monitoring equipment, such as power meters or network analyzers, to the module outputs. When finished monitoring, disconnect the instruments and the network is left undisturbed.
- LC, SC, ST and FC connectors available.
- Tap percentage is 1% as default, 2%, 3%, 5%, or 10% available on request.

**NOTE:**

- ✚ Actual layout depends on the chosen connector type as well as other factors. However, the principal scheme stays the same.
- ✚ We provide optional port configurations such as: Express Port, Monitor Port, 1310nm passband port and 1550nm port for these multiplexers according to customer choice, need more details, please contact [saleschina@auxora.cn](mailto:saleschina@auxora.cn)
- ✚ When using with 1310nm legacy SDH/SONET, CWDM wavelengths 1271, 1291, 1311, 1331 and 1351nm should not be used.
- ✚ When using with 1550nm legacy SDN/SONET, CWDM wavelengths 1511, 1531, 1551, 1571 , 1591, 1611nm should not be used.


**Mechanical Drawing: (only for reference)**

- 19" 1RU Rack chassis or 23" 1RU Rack chassis

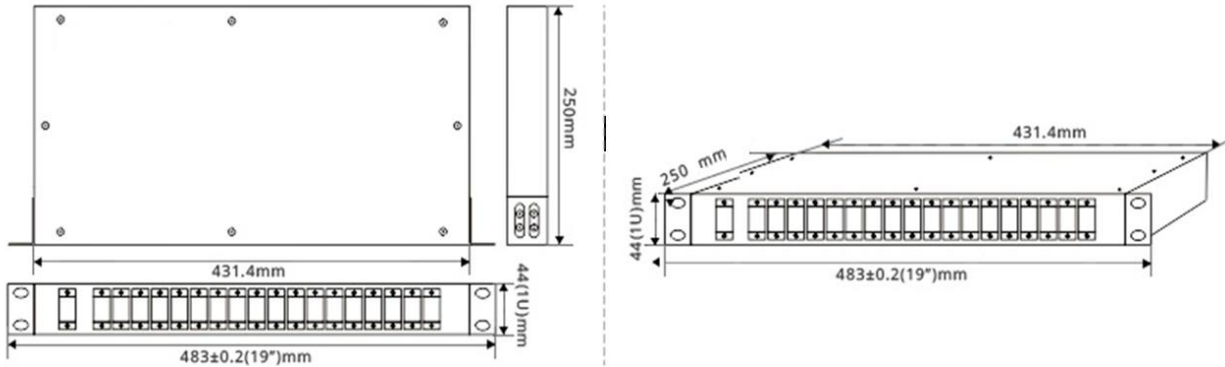

- LGX Metal Box

LGX-Three (Standard): Fit to Empty 4RU 19 inch Rack Mount beside

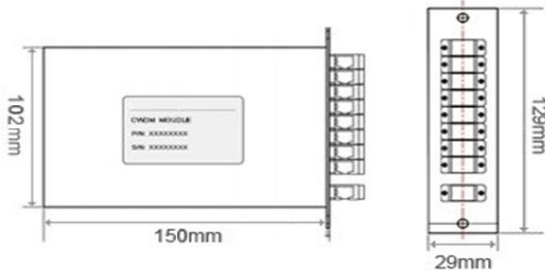


150 x 129 x 29 mm



4RU rackmount holding 12pcs LGX-Three

LGX-Two: Fit to Empty 1RU 19 inch Rack Mount beside

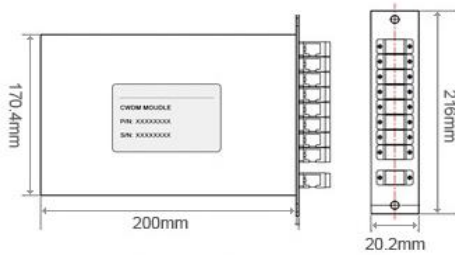


200 x 216 x 20.2mm



1RU rackmount holding 4pcs LGX-Two

LGX-One: Fit to Empty 1RU 19 inch Rack Mount beside

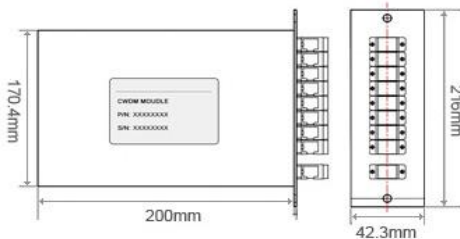


200 x 216 x 42.3 mm




1RU rackmount holding 2pcs LGX-One


● **ABS Box**

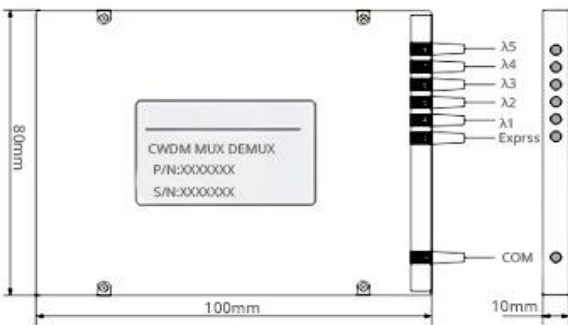


100 X 80 X 10mm

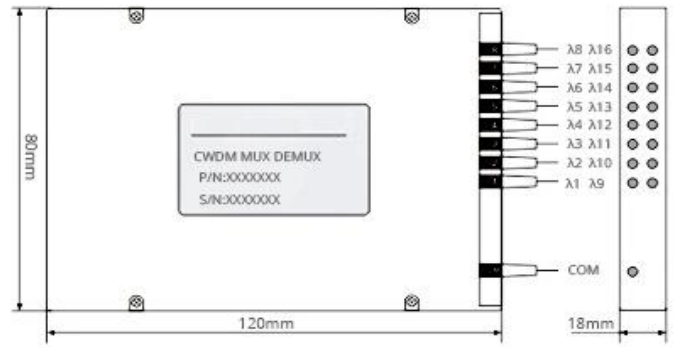

120 X 80 X 18mm

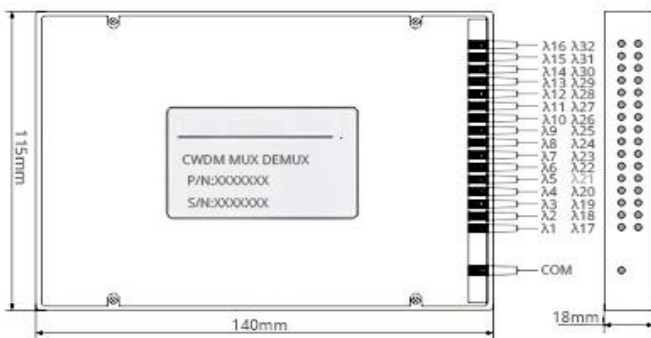


140 X 115 X 18mm

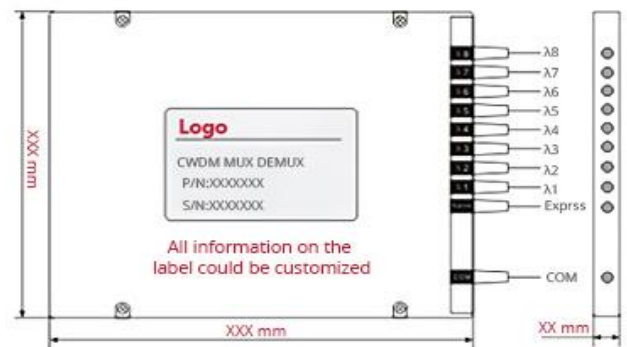

The size could be customized to your requirements


Please note that the drawings shown here only refer to the dimensions and don't not show the specific configuration of the module.

**Typical Spectral Diagram:**

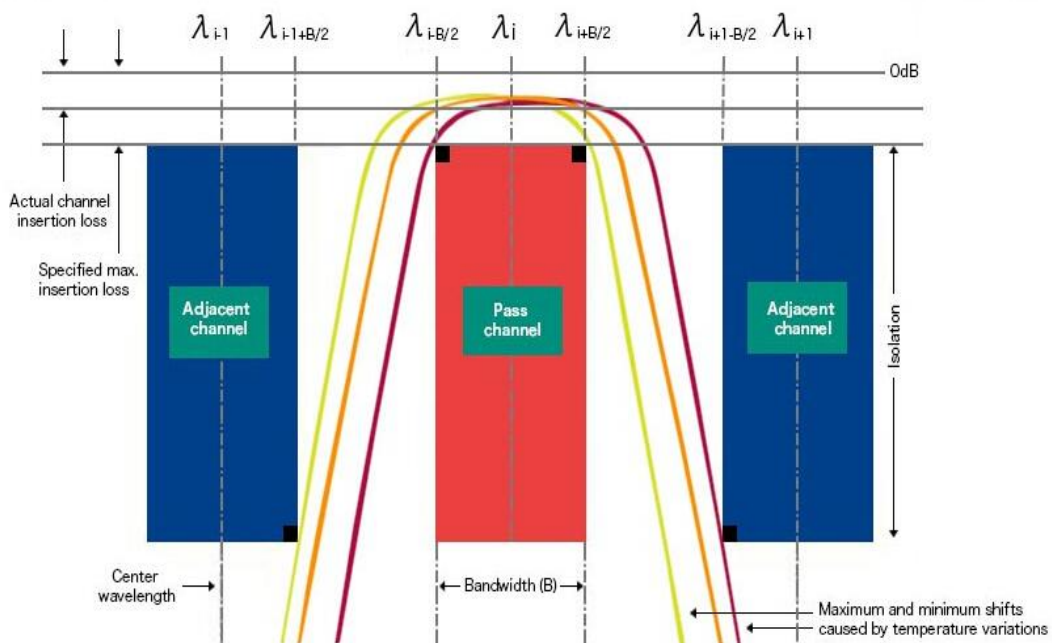



**Inter-connect Diagram:**

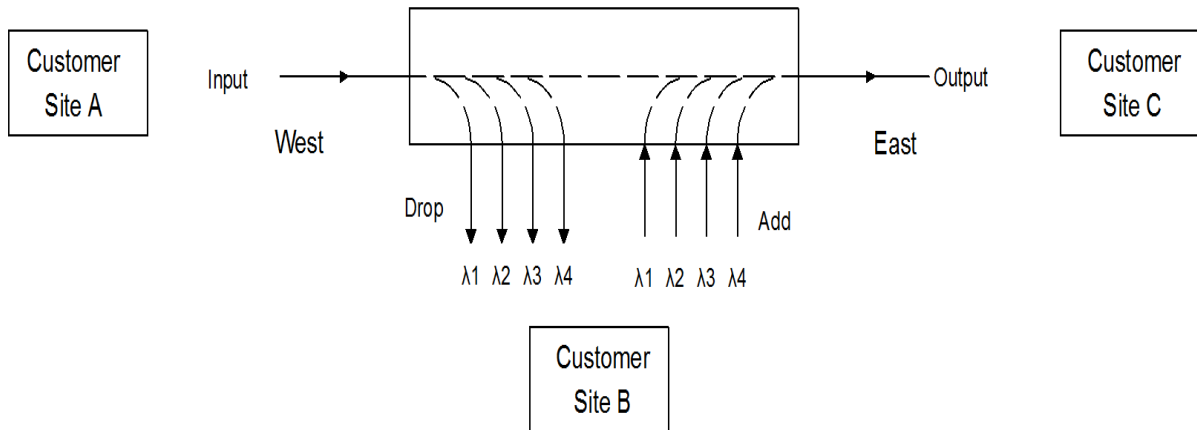

**Ordering Information: (e.g. ACM-1AD040047PS1-1010-55)**

ACM-	X	XX	XX	XX(X)	XX	XX	X	-	XX	XX	-	X	X
	ITU	Module Type	Port Configuration	Special Ports	Initial Wavelength	Package Type	Fiber Jacket	Fiber Length		Connector			
								Input	Output	Input	Output		
	0=0 Serial	AD=Single Direction OADM	01=1-CH	00=None	27=1270/1271	P0=80*60*8	0=250um Bare fiber	10=1.0m	10=1.0m	0=None	0=None		
	1=1 Serial	X= Customized	02=2-CH	01=1310nm Port	29=1290/1291	P1=80*60*12	1=900um tube	12=1.2m	12=1.2m	1=FC/UPC	1=FC/UPC		
			.....	02=Monitor Port	.....	P2=125*96*15	2=2.0mm Cable	.....	.....	2=FC/APC	2=FC/APC		
			18=18-CH	03=Express Port	61=1610/1611	P8=100*80*10	3=3.0mm Cable	15=1.5m	15=1.5m	3=SC/UPC	3=SC/UPC		
				04=UPG with Skipper		PM=120*80*18	N=NA	NA=N/A	NA=N/A	4=SC/APC	4=SC/APC		
				12=1310nm+Mon.		PL=140*115*18	X=Customized	XX=customized	XX=customized	5=LC/UPC	5=LC/UPC		
				13=1310nm+EXP.		L1=LGX -One				6=LC/APC	6=LC/APC		
				42=UPG+Monitor		L2=LGX -Two				XX=Customized	XX=Customized		
				.....		L3=Standard LGX							
				123=Express+Monitor +EXP.		19=19"rack mount							
						XX= Customized							